


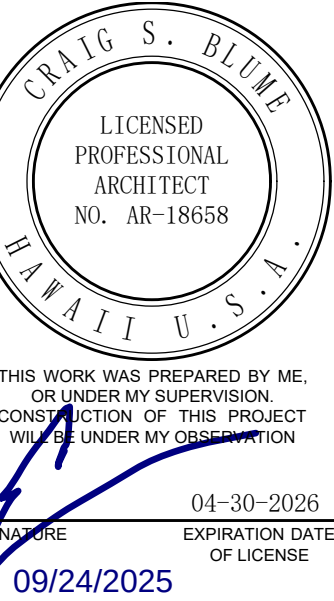

1. CLOSE GAP FROM COOLER WITH STAINLESS STEEL TRIM.
2. FINISHES IN ALL FOOD PREP AREA MUST BE SMOOTH, NON-ABSORBENT, CLEANABLE, AND DURABLE MATERIALS.
3. ALL WALLS AND CEILING REQUIRED TO BE WASHABLE TO HAVE SMOOTH FINISH.
4. FLOORING IN ALL FOOD PREP AREA SHALL BE SMOOTH, NON-ABSORBENT, EASILY CLEANABLE, AND DURABLE. THE FLOORING SHALL BE OF AN APPROVED TYPE THAT CONTINUES UP THE WALL 4" IN A SEAMLESS MANNER, FORMING A 3/8" MINIMUM RADIUS COVE AS AN INTEGRAL UNIT.
5. GC TO PROVIDE GREENBOARD AT ALL HIGH MOISTURE AREA, SUCH AS RESTROOM, KITCHEN, AND JANITOR'S CLOSET. ALL SURFACES BENEATH AND BEHIND SINKS SHALL BE STAINLESS STEEL OR EQUIVALENT.
6. GC TO ENSURE ACCESSIBLE TRANSITION BETWEEN FLOOR TYPES.
7. GC TO OFFSET ALL 12"x24" TILE BY 1/3 MAXIMUM PER INDUSTRY STANDARDS AND MANUFACTURER RECOMMENDATIONS.
8. ALL INSET/CORNER TILES TO BE FULL TILES ONLY.
9. GC TO PROVIDE WALL/FLOOR TILE PATTERN LAYOUT AND DIMENSIONS TO OWNER AND ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO INSTALLATION.
10. GC TO PREP EXISTING FLOORING TO RECEIVE NEW FLOORING AS SCHEDULED AND ENSURE TOP OF NEW FLOORING ALIGNS WITH EXTERIOR SLAB FOR ACCESSIBILITY COMPLIANCE.
11. INTERIOR FINISH MATERIALS APPLIED TO WALLS AND CEILING SHALL HAVE A MAXIMUM FLAME SPREAD CLASSIFICATION OF II FOR EXIT CORRIDORS AND III FOR OTHER ROOMS OR AREAS.
12. ALL PIPING AND REFRIGERATION COILS IN FOOD PREPARATION AREAS TO BE CONCEALED.
13. PROVIDE STAINLESS STEEL PANEL AT ALL WALLS OF FOOD PREP AREA.
14. QUARRY TILE TO BE DALTILE 6"x6"x1/4" OR APPROVED EQUAL.
15. T-BAR CEILING IN FOOD PREPARATION AREA USE USG WASHABLE SURFACE VINYL TILE, USG STIPPLE WHITE #3270.
16. PROVIDE STAINLESS STEEL PANEL AT ALL WALLS BEHIND COOKING EQUIPMENT.
17. SMOOTH, DURABLE, EASILY CLEANABLE AND NON-ABSORBENT WALL AND CEILING FINISHES WILL BE REQUIRED IN THE FOLLOWING AREAS:
 - a. WHERE FOOD IS PREPARED OR PACKAGED,
 - b. CUSTOMER SELF-SERVE LOCATIONS WHERE OPEN FOOD OR BEVERAGE IS DISPENSED,
 - c. SALAD BARS, BUFFETS, CONDIMENT STATIONS, BEVERAGE STATIONS, ETC.)
 - d. WHERE UTENSILS ARE WASHED OR STORED (JANITOR AREAS),
 - e. RESTROOMS (CUSTOMER RESTROOMS DO NOT REQUIRE LIGHT-COLORED WALL OR CEILING FINISHES THOUGH IT IS RECOMMENDED),
 - f. EXTERIOR OF WALK-IN REFRIGERATORS/FREEZERS,
 - g. GARBAGE AND REFUSE STORAGE.
18. THE FLOORS IN THE ABOVE AREAS MUST EXTEND INTEGRALLY UP THE WALLS AND TOE KICKS AT LEAST 4 INCHES WITH A MINIMUM 3/8" RADIUS. TOP SET/SLIMFOOT COVING NOT ALLOWED IN THESE LOCATIONS.
19. REFER TO CEILING PLAN FOR CEILING HEIGHT AND FINISHES.
20. PROVIDE WONDERBOARD OVER PLYWOOD FOR CERAMIC TILE.
21. EXPOSED CONCRETE TO RECEIVE HARDENER AND CLEAR SEALER. (SEALER MUST BE APPROVED BY LOCAL HEALTH DEPARTMENT)
22. ACOUSTICAL CEILING TILES TO HAVE FACTORY FINISH WASHABLE SURFACE.
23. WHERE REQUIRED AT DEMISING WALLS, PROVIDE FURRING WALL FOR NEW PLUMBING.
24. PROVIDE MOISTURE RESISTANT GYPSUM BOARD AT WALLS.
25. 4" MINIMUM COVE BASE WITH MINIMUM 3/8" RADIUS SHALL BE PROVIDED AT THE JUNCTION OF THE WALL AND FLOOR FOR QT-8 (QUARRY TILE). SEE DETAIL 11/A402

No.	DATE	DESCRIPTION
3	09-24-25	PLANNING DEP. COMMENTS

TEN

AN BBQ HOUSE

1. TILE TRANSITION LINE TYPICAL.
2. NEW WALK-IN COOLER/ FREEZER.
3. PROVIDE FRP UNDER THE COUNTER ONLY. PROVIDE SS WHERE VISIBLE TO CUSTOMERS.

 KEYNOTE TAG

 EXISTING WALL TO REMAIN, PROTECT IN PLACE

 NEW NON-RATED PARTITION WALL, SEE A401 FOR WALL ASSEMBLY DETAILS

 NEW WALK-IN COOLER WALL

 FLOOR FINISH MATERIAL

 FINISH MATERIAL TAG

 WALL BASE MATERIAL

 FD FLOOR DRAIN, SEE A201 FOR NEW FLOOR DRAIN LOCATION


 FLOOR SINK, SEE A201 FOR NEW FLOOR SINK LOCATION

GEN KOREAN BBQ HOUSE
75-971 HENRY STREET
KAILUA KONA HI 96740

FINISH FLOOR PLAN

AWN	CHECKED
TE 09/24/25	
SALE	AS NOTED
PROJECT NUMBER	
EFFECT	

A204

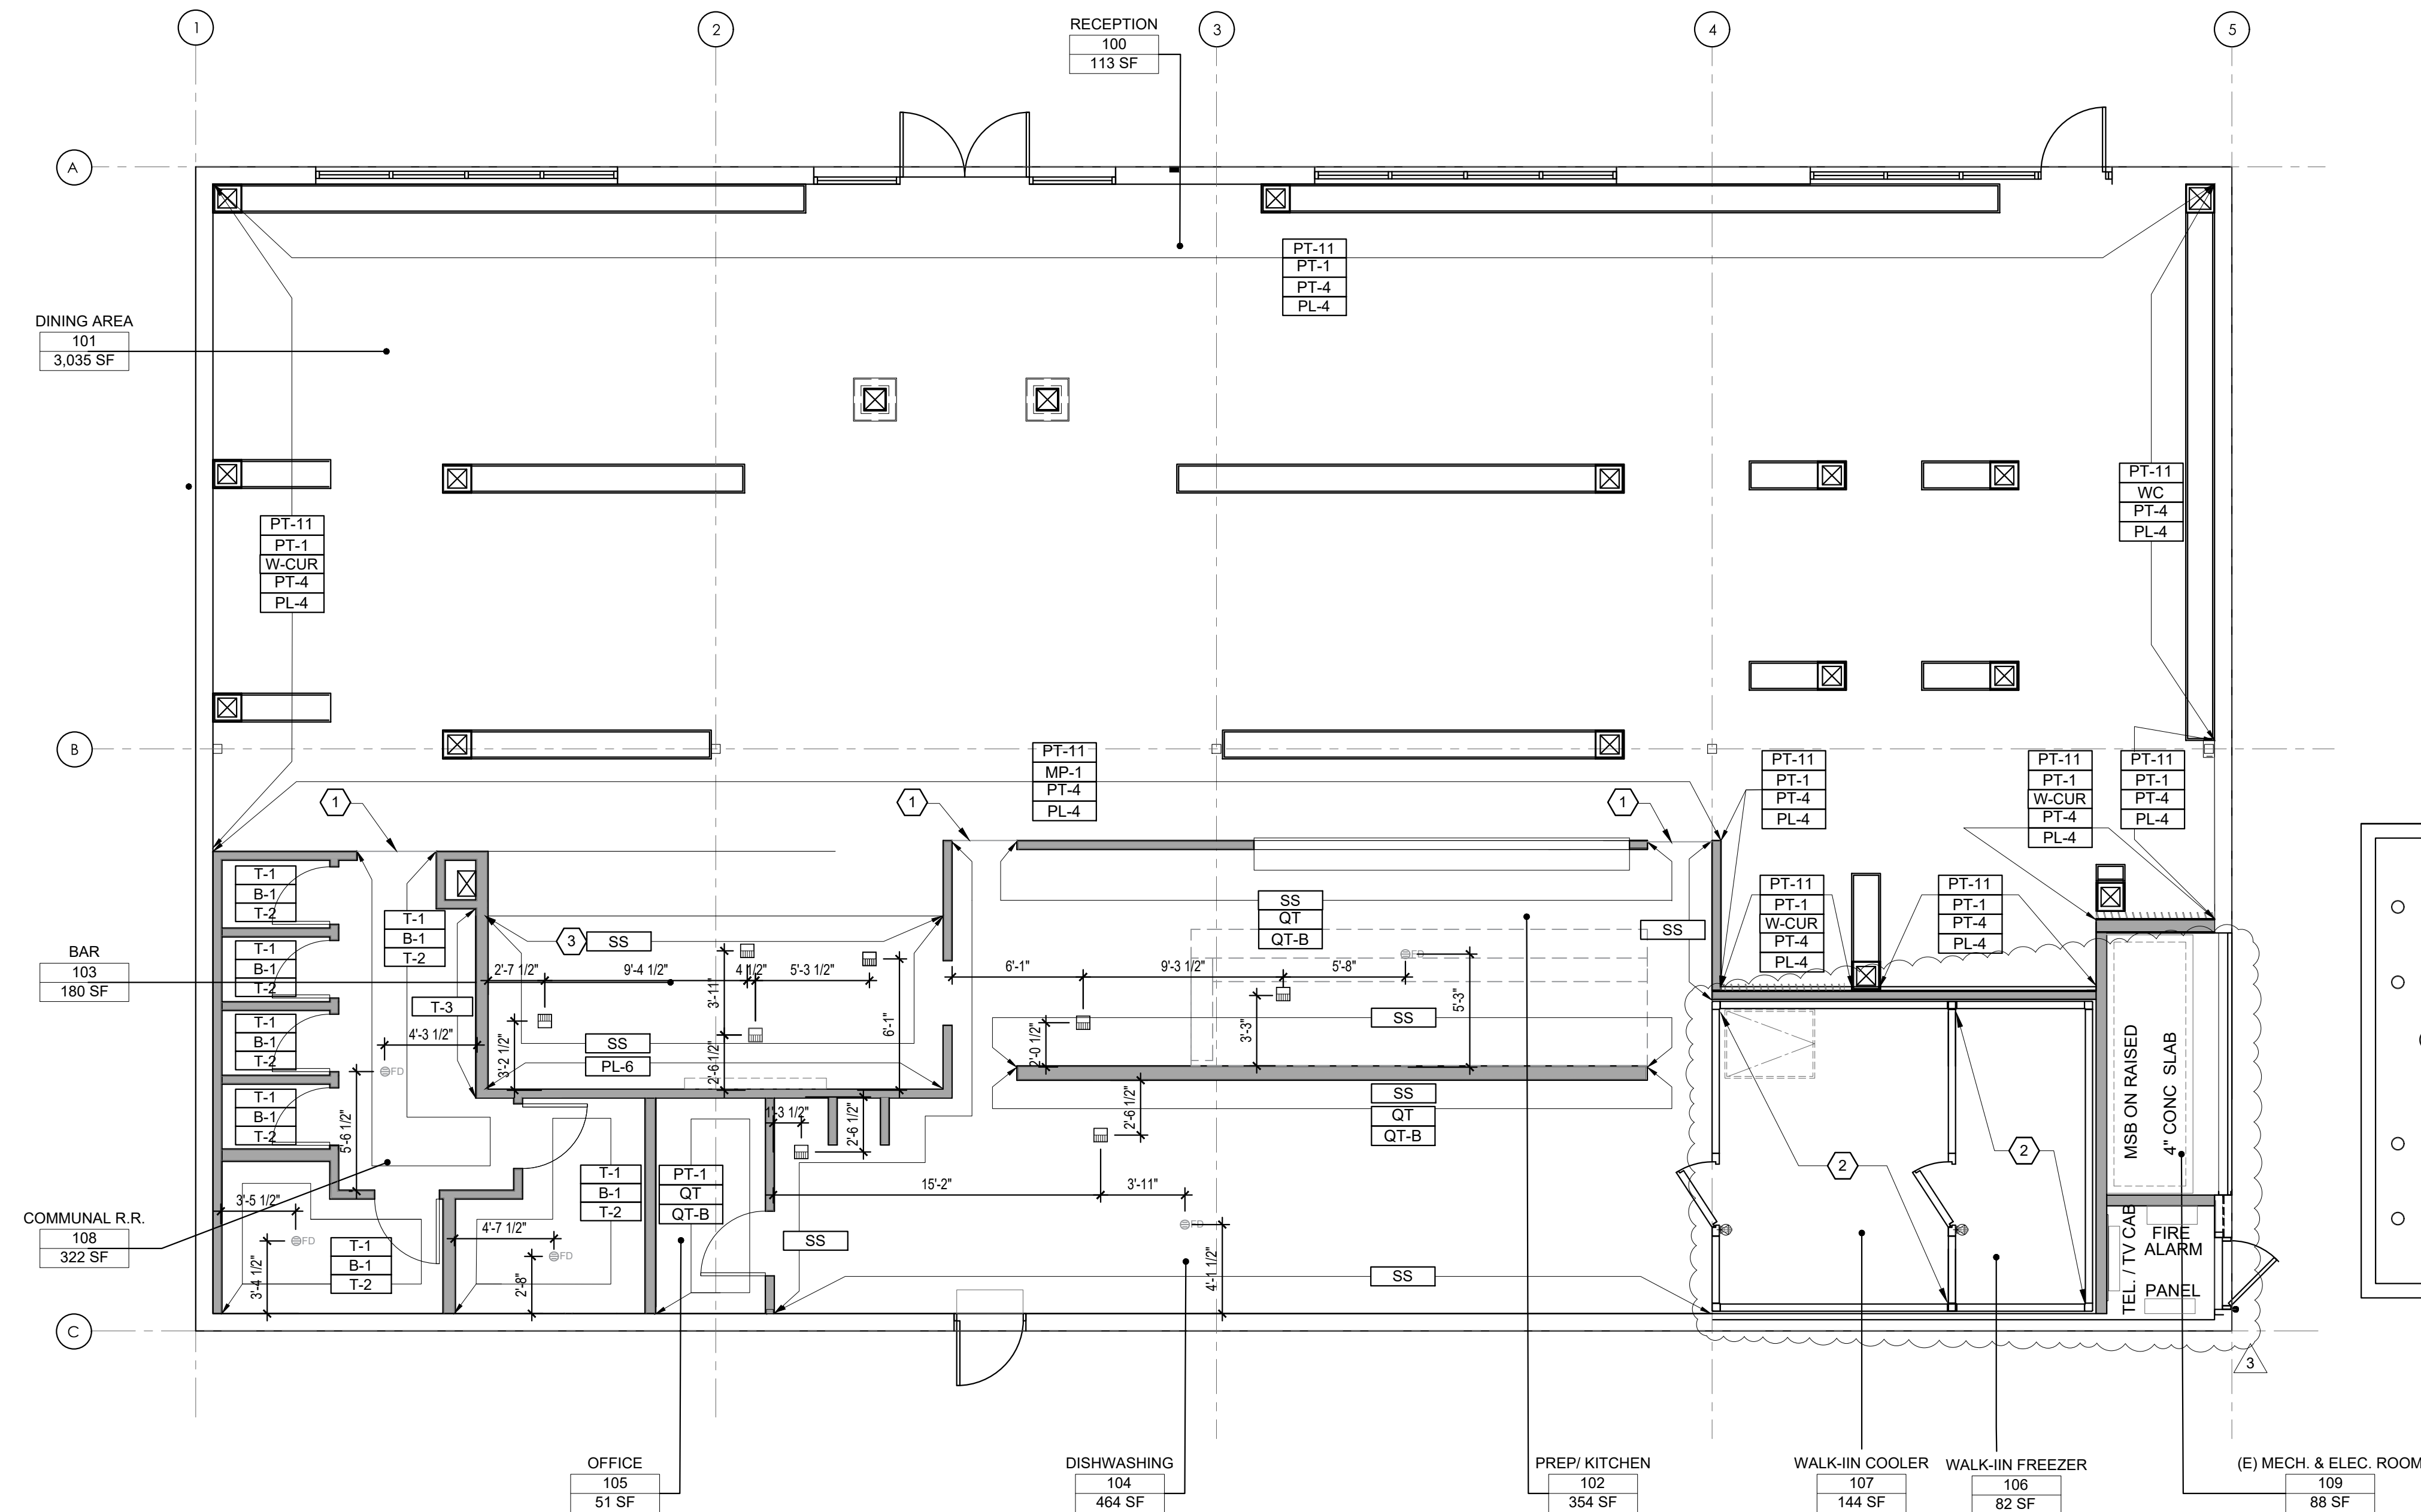

TRUE NORTH

PROJECT NORTH

1	FINISH FLOOR PLAN
---	-------------------

3/16" = 1'-0"	NOTE:
---------------	-------